

# 管帽

ГОСТ 17379-2001

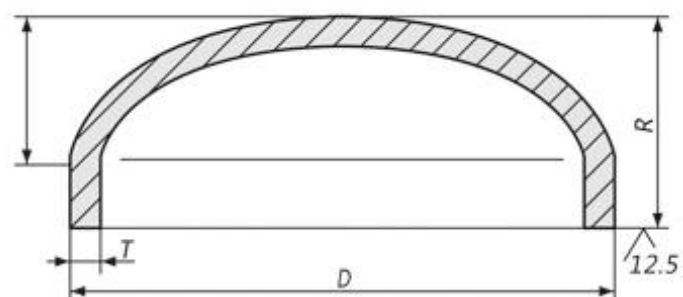


Таблица 2— Заглушки исполнения 2

Размеры в миллиметрах

DN	D	T	K		DN	D	T	K	Масса, кг
25	32	2.0	15	0.1	50	57	3.0	30	0.2
		3.0		0.1			5.0		0.3
32	38	2.0	20	0.1	65	76	3.5	40	0.4
		3.0		0.1			6.0		0.5
40	45	2.5		0.1	80	89	3.5	45	0.6
		4.0		0.2			8.0		0.9
100	108	4.0	50	0.7	300	325	10.0	100	11.0
		8.0		1.3			12.0		13.0
	114	4.0		0.7			18.0		19.0
		8.0		1.3			20.0		21.0
125	133	4.0	55	0.9	350	377	10.0	115	16.0
		8.0		2.0			12.0		19.0
		10.0		2.5			16.0		26.0
				2.5			20.0		32.0
150	159	4.5	65	1.5	400	426	10.0	125	19.0
		8.0		2.3			12.0		23.0
	11.0	3.2		16.0			30.0		
		3.2		18.0			34.0		
168	4.5	1.5	22.0	42.0					
	8.0	2.3	26.0	50.0					
200	219	8.0	75	4.6	500	530	10.0	150	25.0
		10.0		5.1			16.0		40.0
		12.0		6.1			20.0		50.0
250	273	7.0	85	4.9	500	530	22.0	150	55.0
		12.0		9.2			26.0		65.0
		14.0		11.0			30.0		75.0
		18.0		14.0					